



AT4 Four-Wire Resistive For Small Form Factor Applications

Elo's AT4 four-wire resistive touchscreens are the cost-effective touch solution for small form factor applications while providing reliability, low power consumption, and narrow border width. The AT4 touchscreens enable broad input flexibility, with finger, gloved hand, or stylus activation, and it's the ideal touch solution for portable devices, office automation, light industrial automation, medical equipment, and consumer products. The AT4 four-wire resistive touchscreens are another quality product from Elo TouchSystems, the complete touch solutions provider.

Benefits

- Cost-effective
- Low power consumption
- Narrow border width
- Broad input flexibility
- Backed by Elo

Applications

- Portable devices
- Office automation
- Light industrial automation
- Medical equipment
- Consumer products

AT4 Four-Wire Resistive Specifications

MECHANICAL

Input Method	Finger, gloved hand, or stylus activation
Available Sizes	5.7" to 10.4"; visit our Web site for full specifications and other offerings

ELECTRICAL

Positional Accuracy	1.5% or less
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096
Touch Activation Force	Typically 80 grams
Controller	Board: Serial (RS232) and USB Chip: Serial (RS232) and USB

OPTICAL

Light Transmission	78% or more
--------------------	-------------

ENVIRONMENTAL


Temperature	Operating: 0°C to 50°C Storage: -20°C to 70°C
Relative Humidity	Operating: 0°C to 50°C, 70% RH or lower, noncondensing Storage: -20°C to 70°C, 90% RH or lower, noncondensing
Altitude	Operating: The touchscreen shall be capable of operating at an altitude of 10,000 feet above sea level Storage: The touchscreen shall be capable of being stored without damage at an altitude of 50,000 feet above sea level
Agency Approvals	UL, TÜV
Sealability	Can be sealed to meet NEMA 4 and 12 and IP65 standard

DURABILITY

Surface Durability	3H per JIS K5400
Expected Life	Operationally tested to 1 million touches in one location without failure
Warranty	Touchscreen: 1-year limited warranty Controller: 5-year limited warranty



2216 combo controller board

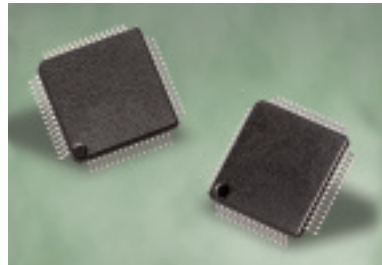

COACH III combo controller chip

To find out more about Elo's extensive range of touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo TouchSystems
301 Constitution Drive
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4700

Fax 1-650-361-4747

eloinfo@elotouch.com

Europe

Tel +32 (0)16 35 21 00

Fax +32 (0)16 35 21 01

elosales@elotouch.com

Asia-Pacific

Tel +81 (45) 478-2161

Fax +81 (45) 478-2180

www.tps.co.jp

Latin America

Tel 1-305-428-5210

Fax 1-305-717-4909

www.elotouch.com.ar



Tyco Electronics reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

AT4, COACH and Elo TouchSystems, IntelliTouch, TE Logo and Tyco Electronics are trademarks.
Copyright 2007 Tyco Electronics Corporation ELO-147 9/07



Our commitment. Your advantage.